


GY-521 3 Achsen MPU-6050 Beschleunigungssensor / Gyroskop / Accelerometer

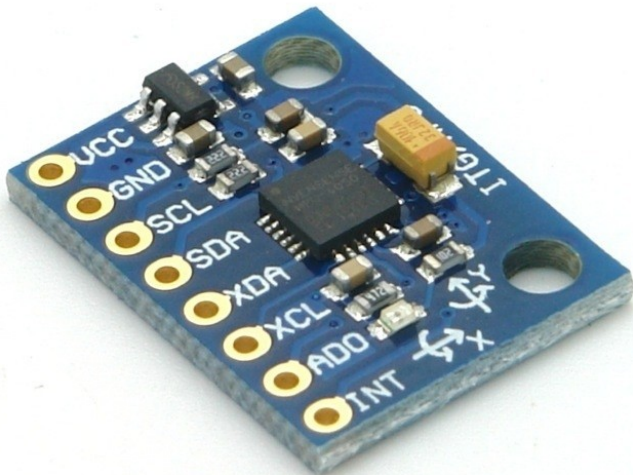

Artikel-Nr.:	GY-521
Hersteller:	Frei
EAN:	4251266702566
Herkunftsland:	China
Zolltarifnummer:	84733020
Gewicht:	0.003 kg

Technische Daten

- MPU-6050 module (three axis gyro + three axis acceleration)
- Power supply: 3-5v (internal low voltage difference)
- Communication: the standard IIC communication protocol
- Chip with built-in 16bit AD converter, 16 bit data output
- Gyro scope: ± 250 500 1000 $2000^\circ /s$
- Acceleration range: + 2 + 4 + 8 + 16g

Beschreibung Chipsatz

MPU-6000 is the worlds first integrated 6 axis motion processing components, compared to multiple component solutions, from the combination of gyro and accelerator axis difference problem, reducing the amount of packaging space. MPU-6000 integrates 3 axis gyroscope, 3 axis accelerator, and with the second I2C ports connected to other brands of accelerator, magnetic sensor, or other sensor digital motion processing (DMP: Digital Motion Processor) hardware acceleration engine, mainly I2C port to a single data stream to the application form, output complete 9 axes fusion routing technology

InvenSense motion processing database, can deal with motion sensing of complex data, reduces the motion processing operations on the operating system of the load, and provides a framework for application and development of API.

MPU-6000 angular velocity the whole grid sensing range is $\pm 250, \pm 500, \pm 1000$ and $\pm 2000^\circ /sec$ (DPS), can accurately catch Zong of fast and slow movements, and a user programmable control of the accelerator, the whole grid sensing range is $\pm 2G, \pm 4G \pm 8g$ and $\pm 16g$. The product can be up to 400kHz transmission through I2C or up to 20MHz SPI.

MPU-6000 can be in different voltages, VDD power supply voltage medium was $2.5V \pm 5\%$, $3.0V \pm 5\%$ or $3.3V \pm 5\%$, VVDIO logical interface power supply for $1.8V \pm 5\%$. The MPU-6000 package size $4x4x0.9mm$ (QFN), the industry was revolutionized by the size. Other features include a built-in temperature sensor, included in the operation environment is only $\pm 1\%$ variable oscillator.

Anwendungsbeispiele

- Motion sensing games
- Augmented reality
- Electronic & optical image stabilization

Lieferumfang

1x GY-521 Modul

2x Stiftleiste (1x gerade, 1x 90° gewinkelt)

Weitere Bilder:

